
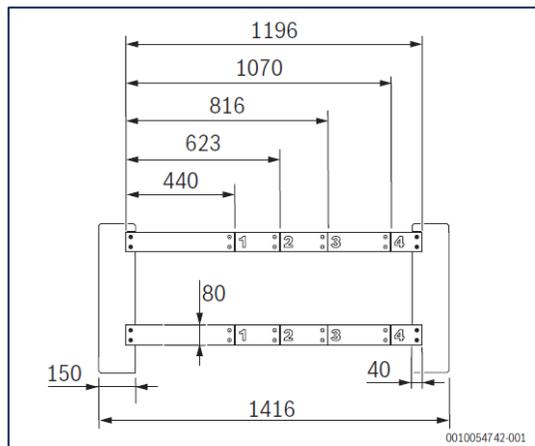


# Logatherm Fertigfundament.

## Maße.

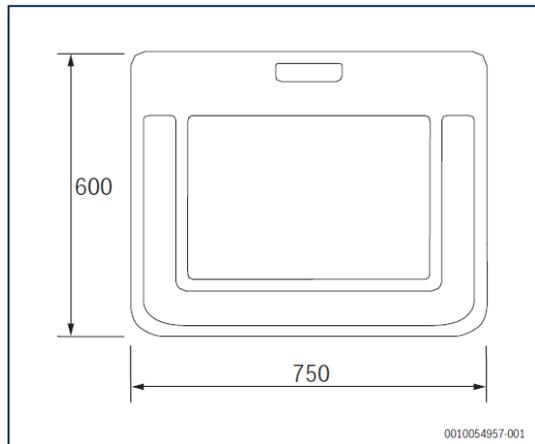

Markierung	Länge Distanzbretter	Gesamtlänge Fertigfundament	Verwendung für Außeneinheiten
1	440 mm	660 mm	WLW196i-4 /-6 /-8 AR WLW196i.2 -4 /-6 AR (S+)
2	623 mm	843 mm	WLW166 (alle Produkttypen) WLW196i-11 /-14 AR
3	816 mm	1036 mm	WLW176-4/ -5/ -7 MB AR WLW186-4/ -5/ -7 MB AR WLW176-4/ -5/ -7 MB AR + Sockel klein WLW186-4/ -5/ -7 MB AR + Sockel klein
4	1070 mm	1290 mm	WLW176-10/ -12 MB AR + Sockel groß WLW186-10/ -12 MB AR + Sockel groß
<b>Maximallänge</b>	1196 mm	1416 mm	WLW176-10/ -12 MB AR WLW186-10/ -12 MB AR